





nileairtools



# NEW MINI BELTER PAT.

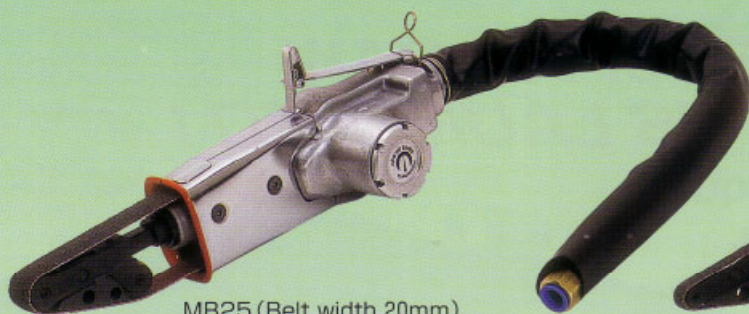

MB25 (Belt width 20mm)

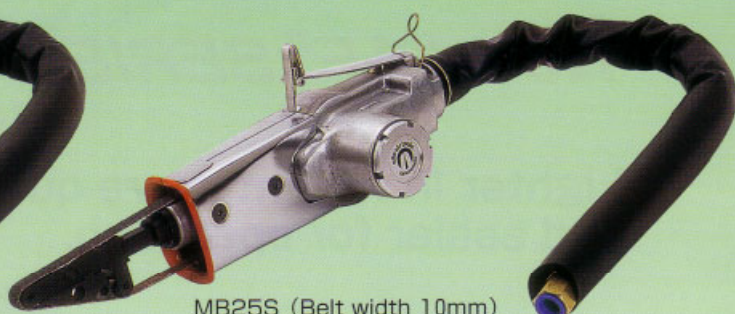

MB25S (Belt width 10mm)  
For use in narrow confined places



*The PAT. 3-point belt supporting system offers easier and more smooth sanding operation for better finish.*

## ( FEATURES )

- Lever type throttle system for easy operation control.
- One-touch adjustable Slide Arm for quick replacement of sanding belts.
- Belt Pad is also one-touch detachable.
- Rear exhaust for quiet operation.

## ( APPLICATIONS )

- Sanding for various auto-repair services such as...
  - Removing spot welding.
  - Removing paint off flat or curved surfaces.
  - Removing adhesives.
  - Removing welding bead.
- Finishing wood work.
- Deburring small metal products.
- General finishing work.
- Removing rust.
- Other sanding and polishing work.

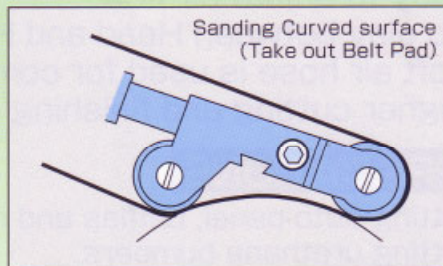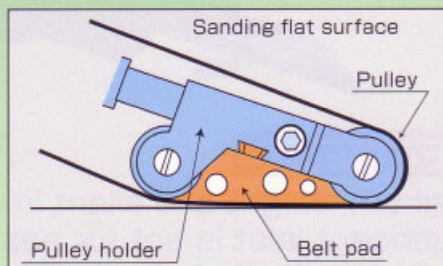

### Sanding Belt of ZIRCONIA RESIN (option)

No.	Grit	Dimensions W×Circ	Fitting Model No.
# 40	P 40	20×520 mm	MB25
# 60	P 60		
#100	P100	10×520mm	MB25S
# 60-10	P 60		
#100-10	P100		

Model No.	Belt dimensions W×Circ mm	Body length mm	Body weight g	Belt speed at non load m/min	Air consumption l/min	Air pressure MPa	Notes
MB25	20×520	300	1,310	2,200	300	0.6	Diameter of pulley φ24mm
MB25S	10×520	300	1,180	2,200	300	0.6	Diameter of pulley φ14mm

